

	DATASHEET	Part No.
	Multilayer ceramic capacitor	ACX02X06N225MNDC

CUSTOMER :

DATA SHEET

Product name	: Multilayer ceramic capacitor
Part number	: ACX02X06N225MNDC
Features	: 0402inch / 1005mm, 2.2uF, ±20%, X5R, DC 6.3V
Revision date	: 2020/08/04

	Address : 380, NAMDONGSEO-RO, NAMDONG-GU INCHEON, 21629 KOREA (AMOTECH. CO., LTD)
	Contact : TEL) 82-32-821-0363, FAX) 82-32-811-0283

	DATASHEET	Part No.
	Multilayer ceramic capacitor	ACX02X06N225MNDC

1. Part descriptions :

1.1 Feature :

- 0402inch / 1005mm size
- Wide range of capacitance and voltage
- Highly reliable performance
- Tape & Reel for surface mount assembly
- Stable temperature dependence of capacitance
- RoHS compliance, Halogen free

1.2. Applications :

- General electronic circuit
- General power supply circuit (SMPS etc.)
- DC-DC converter

1.3. Circuit Applications :

- Coupling & Decoupling
- Filtering
- Bypass and DC Blocking


2. Specifications

2.1 Electrical characteristics

Part number	ACX02X06N225MNDC (Consumer)
Material	X5R
Rated voltage (Vdc) [V]	6.3
Capacitance [μF] @1kHz, 0.5Vrms	2.2 (\pm 20%)
Dissipation factor [%] @1kHz, 0.5Vrms	10 Max.
Insulation resistance [Ω*F] @Vdc	50 Min.
Operating temperature [$^{\circ}$C]	-55 ~ +85


2.2 Mechanical dimension and solder pad

■ Mechanical dimension

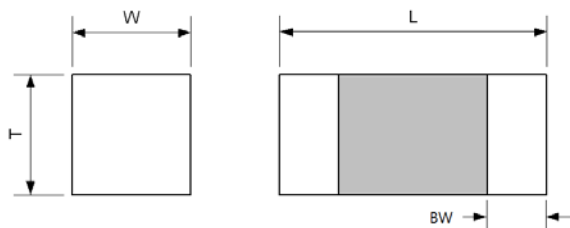

	L	W	T	BW
Size	1.0	0.5	0.5	0.2
(mm)	\pm 0.05	\pm 0.05	\pm 0.05	\pm 0.1

■ Recommended solder pad

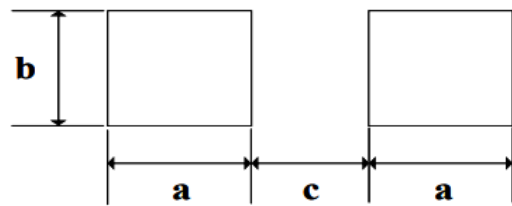

	a	b	c
Size	0.45	0.6	0.5
(mm)	\pm 0.05	\pm 0.1	\pm 0.1

※ Note: Please contact local sales if you want to order low profile products or some special products are excluded from this data sheet.

2.3. Typical performance data

